

Bidirectional  
REGENERATIVE



Embedded  
WEB-SERVER



Arbitrary  
Waveform  
Generation



Embedded  
Oscilloscope



## Bidirectional Regenerative High-Precision Digital Battery Cyclers/Testers

**BatReg<sup>2</sup>**

Your **DIGITAL**  
**POWER ELECTRONICS**  
Partner.

- Bidirectional & Regenerative Battery Cyclers / Testers with high-stability, low noise and fast response based on digital control
  - Control and sampling of output current and voltage at 24-bit, 100 ksps
- High-efficiency in both AC-DC and DC-AC modes for consistent energy savings in large installations
- Embedded Web-Server with Integrated Arbitrary Waveform Generation (AWG) and Oscilloscope

### FEATURES

- Bidirectional and Regenerative
- Battery Polarity detection circuit
- Models up to 100 V and up to 150 A
- High efficiency for energy and cost savings
- Configurable digital control loop
- Maximum sampling at 100 ksps 24-bit
- Analog Control Input, Trigger Input, Auxiliary ADC Input and K-type thermocouple Temperature readout - optional
- Embedded Waveform Generation and 4-channel Oscilloscope at 100 ksps 24-bit
- Embedded Web-Server
- Configurable acoustic alarm
- External Interlocks and Status Signals
- 10/100/1000 Mbit Ethernet TCP-IP or UDP connectivity

### APPLICATIONS

- Battery Testing and Cycling
- Battery Charging
- Battery Simulation


**B**atReg<sup>2</sup>. The BatReg<sup>2</sup> (Battery Regenerative Regulator) series is the new generation of **bidirectional** and **regenerative** power supplies specifically designed for the demanding needs of precision battery testing and cycling. These units are designed to **safely return the excess energy to the grid** while having state-of-the-art performances in all output control modes. Single models **up to 100 V** and **up to 150 A** are available.

These modules embed a **polarity detection circuit** that safely checks the connection to the battery in order to prevent damages or risks and enables the output only on a positive check.

A 4-channel **oscilloscope** running at 100 ksps/channel and an Arbitrary Waveform Generator (**AWG**) can be easily accessed via the Web Interface GUI in the **embedded Web Server** and they can be used for control and monitoring. The **10/100/1000 Mbit Ethernet** connection over TCP-IP or UDP and the two SFP+ slots allow controlling the power

converter in different modes. The control loop is digital in order to obtain the maximum flexibility and easiness of configuration to any connected battery type (cells, modules and also packs).

The BatReg<sup>2</sup> power units feature **high-efficiency** both in charging and discharging modes. The regenerative architecture allows sending the energy back into the grid in the discharge phase. Cost savings for a 100-unit installation may reach 150.000-200.000 \$/year<sup>1</sup>.

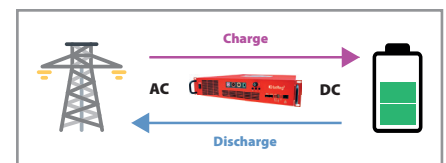

**Energy Regeneration Scheme**

External configurable interlocks, over-voltage and over-current protections among others are also available via the power platform given by the on board **SoC** (FPGA+CPU) and **DSP**.

# BatReg<sup>2</sup>

## About Us


CAEN ELS is a leading company in the design of power supplies and state-of-the-art complete electronic systems for the most demanding research and high-end industrial applications.

### CAEN ELS s.r.l.

via Karl Ludwig Von Bruck 32  
34144 - Trieste (TS)  
Italy

Registered Office:  
via Vetraria 11  
55049 - Viareggio (LU)  
Italy

info@caenels.com  
www.caenels.com

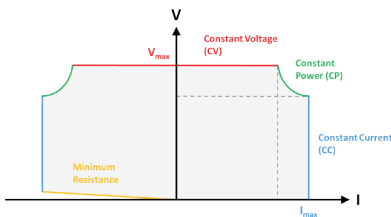

**Bidirectional Operation for BatReg<sup>2</sup>**



**Embedded Web-Server  
with AWG and OSCILLOSCOPE**

## Technical Specifications



		10-150	20-100	40-50	50-30	100-20
<b>Output Voltage Range</b>		0 - 10 V	0 - 20 V	0 - 40 V	0 - 50 V	0 - 100 V
<b>Output Current Range</b>		±150 A	±100 A	±50 A	±30 A	±20 A
<b>Rated Output Power</b>		1.500 W	1.500 W	1.500 W	1.500 W	2.000 W
<b>Output Topology</b>		Bidirectional				
<b>Regulation Type</b>		Constant Current (CC), Constant Voltage (CV), Constant Power (CP)				
<b>Current Setting/Readback</b>		24 bit				
<b>Voltage Setting/Readback</b>		24 bit				
<b>Equiv. Switching Frequency</b>		400 kHz	400 kHz	200 kHz	200 kHz	200 kHz
<b>Efficiency</b>	AC/DC	> 86 %				
	DC/AC	> 80 %				
<b>Power Factor</b>	AC/DC	> 0.98				
	DC/AC	> 0.99				
<b>Rise Time 10-90%*</b>		< 60 μs				
<b>Closed Loop Bandwidth (-3 dB)**</b>		> 6 kHz				
<b>Output Accuracy (RMS)</b>		< 0.01 %/FS				
<b>Temperature Stability</b>		< 5 ppm/K/FS in CC				
<b>Long-Term Stability (8 h)</b>		< 0.001 %/FS in CC				
<b>Cooling</b>		Forced air convection				
<b>Input Ratings</b>		180 - 264 V <sub>AC</sub> / 47 - 63 Hz				
<b>Communication Interfaces</b>		10/100/1000 Mbit Ethernet TCP-IP and UDP 2 x Fast SFP+ ports				
<b>External Signals</b>		Acoustic alarm (enabled/disabled) 4 x External Interlock Inputs (configurable dry contacts) 1 x Status Output relay (magnetic) 1 x Output Relay (solid state) 1 x Trigger Input (LVTTTL, TTL) - FB1K5OPT0001 option 1 x Analog Control Input (±10 V) - FB1K5OPT0001 option 1 x 16-bit 100-kHz ADC Input for readout of external sensors - FB1K5OPT0001 option				
<b>Internal Interlocks</b>		DC-Link Undervoltage Over-Temperature Over-Current and Over-Voltage Regulation Fault				
<b>Hardware Protections</b>		Battery Polarity Detection Circuit with embedded output enable switch Input Fuses				
<b>Operating Ambient Temperature</b>		0 ... 50 °C				
<b>Mechanical Dimensions</b>		19" x 2U x 587 mm (including connectors)				
<b>Weight</b>		15 kg				

\* determined from a step signal of 5% of the full-scale rated voltage applied on a resistive load in CV

\*\* determined from a frequency sweep using a sine wave with an amplitude of 5% of the full-scale rated voltage on a resistive load in CV

<sup>1</sup> estimation based on Electricity Price in New York State (August 2024 - 0.276 \$/kWh) from the U.S. Bureau of Labor Statistics. All power supplies are considered to be working continuously as sources for 12 hrs/day and as sinks for the other 12 hrs/day at full-output power.

Ordering Code	Acronym	Description
BREG2010150A	BatReg <sup>2</sup> 10-150	BatReg <sup>2</sup> 10-150 - High-Precision Digital Battery Regenerative Regulator (10 V, ±150 A)
BREG2020100A	BatReg <sup>2</sup> 20-100	BatReg <sup>2</sup> 20-100 - High-Precision Digital Battery Regenerative Regulator (20 V, ±100 A)
BREG2040050A	BatReg <sup>2</sup> 40-50	BatReg <sup>2</sup> 40-50 - High-Precision Digital Battery Regenerative Regulator (40 V, ±50 A)
BREG2050030A	BatReg <sup>2</sup> 50-30	BatReg <sup>2</sup> 50-30 - High-Precision Digital Battery Regenerative Regulator (50 V, ±30 A)
BREG2100020A	BatReg <sup>2</sup> 100-20	BatReg <sup>2</sup> 100-20 - High-Precision Digital Battery Regenerative Regulator (100 V, ±20 A)
Options		
FB1K5OPT0001	ANALOG, AUX, TRIGGER, K-TYPE	Analog Control, Auxiliary ADC, Trigger and K-type thermocouple Inputs add-ons - optional for BatReg <sup>2</sup>



Copyright © CAEN ELS s.r.l. - 2026

All rights reserved. Information in this publication supersedes all previous versions. Specifications subject to change without notice.

Rev. 1.1 - Printed in January 2026.