



Regul80R

Universal High-Precision
Power Supply Controller



REGUL80R

Your **DIGITAL**
POWER ELECTRONICS
Partner.

- The **REGUL80R** is a universal power supply controller that allows converting your standard power supply or amplifier in a state-of-the-art multi-function power converter
- The digital current control loop makes the connection and configuration of the power supply to any load quick and simple
- Obtain outstanding long-term stability, great accuracy, low temperature coefficient, excellent load and line regulation

FEATURES

- 19"-1U stand-alone crate
- Voltage and Current control
- 100 kHz Regulation Loop
- Up to ± 200 V and ± 1.000 A
- Used with **ELICS** current transducers
- Digital output regulation loop
- Waveform Generation at 100 kHz
- Embedded 4-channel Oscilloscope
- Embedded Web-Server
- External Configurable Interlocks and Status Signals
- External Signals for Analog Control, Analog Acquisition, Hall Probes and Temperature Sensors
- Local Display and Controls
- 10/100/1000 Mbit Ethernet
- Synchronization of multiple units
- Fanless operation

APPLICATIONS

- Programmable Power Supplies
- Laboratory Equipment
- Power Source Emulation

REGUL80R. This breakthrough power supply controller allows converting your programmable power supply unit or amplifier in a state-of-the-art power converter unit with built-in web-server, waveform generation and oscilloscope functions.

This fan-less unit comes together with a **ELICS** current transducer by CAEN ELS and with voltage sensing terminals, with current measuring ranges up to 1.000 A and 200 V.

Any power converter within these ratings can be connected to the controller and its current and voltage values are monitored and stabilized by the internal configurable digital control loop (on a FPGA) so that any load conditions can be easily fit in order to obtain the desired response. This controller will transform any power converter to a ppm-level

stability power unit, with negligible line and load regulation values and will greatly improve the accuracy.

The programmable power supply connected to the REGUL80R can be driven by multiple interfaces: a precision fast DAC (± 5 V or ± 10 V) or a 4-20 mA loop driver.





The 10/100/1000 Ethernet connection over TCP-IP or UDP allows controlling the power converter in a very simple and reliable manner and also accessing the embedded web-server.

The embedded Web-Server allows running pre-loaded or custom waveforms at 100 kps and monitor and record the response of different values - e.g. output current, voltage, etc. - at 100 kps per channel simultaneously.



About Us

CAEN ELS is a leading company in the design of power supplies and state-of-the-art complete electronic systems for the Physics research world, having its main focus on dedicated solutions for the particle accelerator community and high-end industrial applications.


-  Power Supply Systems
-  Precision Current Measurements
-  Beamline Electronics Instrumentation
-  FMC and MicroTCA

CAEN ELS s.r.l.


Via Karl Ludwig von Bruck 32
34144 - Trieste (TS)
Italy

Registered Office:
via Vetraria 11
55049 - Viareggio (LU)

info@caenels.com
www.caenels.com

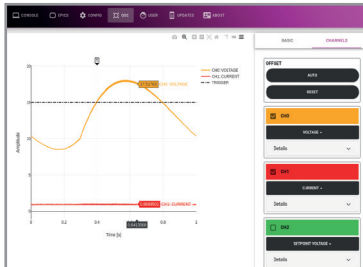

Embedded 4-channel OSCILLOSCOPE

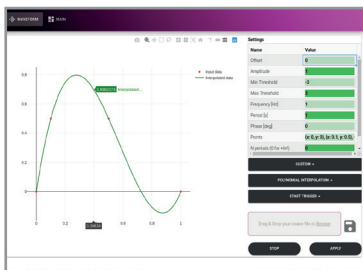

Embedded WAVEFORM GENERATOR

Waveform
Generation



Linux OS



Embedded
EPICS IOC



Technical Specifications

REGUL8OR

Output Current Ranges ¹	± 100 A, ± 150 A, ± 200 A, ± 300 A, ± 400 A, ± 600 A, ± 1000 A
Output Voltage Ranges	± 5 V, ± 10 V, ± 20 V, ± 50 V, ± 100 V, ± 200 V
Maximum Controllable Power	200 kW
Regulation Type	Constant Current (CC) or Constant Voltage (CV)
Current Setting/Readback Resolution	24 bit
Voltage Setting/Readback Resolution	24 bit
Output Readout Resolution	24 bit
Line Regulation	< 0.0005 %/FS in CC mode
Load Regulation	< 0.0005 %/FS in CC mode
Temperature Coefficient (TC)	< 0.0005 %/K in CC mode < 0.005 %/K in CV mode
Long-Term Stability (8 h)	< 0.001 %/FS in CC mode < 0.001 %/FS in CV mode
Overall Accuracy	< 0.01 %/FS in CC mode < 0.01 %/FS in CV mode
Output Control Interfaces	<ul style="list-style-type: none">Analog Voltage Output: ± 5 V or ± 10 VAnalog Current Output: 4 - 20 mA
External Interlocks	<ul style="list-style-type: none">4 x inputs accepting dry-contacts2 x inputs accepting 24 V_{DC} (e.g. from PLC)
External Hardware Interfaces	<ul style="list-style-type: none">2 x output magnetic relay²2 x output solid state relay2 x output isolated TTL (0 - 5 V) signals
External Signals	<ul style="list-style-type: none">1 x Analog control input (±10 V full-scale, 100 ksp/s @ 16 bit)<ul style="list-style-type: none">1 x Analog input (+4 V full-scale, 100 ksp/s @ 16 bit) e.g. readout of an Hall probe1 x 5-V or 20-mA configurable power output available e.g. to supply an Hall probe<ul style="list-style-type: none">1 x isolated SPI interface (4-wire)1 x External Temperature sensor Input including 1.8 V and 3.3 V supply for the temperature sensor<ul style="list-style-type: none">1 x isolated Trigger Input1 x Sync IN and 1 x Sync OUT signals i.e. to synchronize multiple controllers
Connectivity	<ul style="list-style-type: none">1 x Ethernet 10/100/1000 Mbit TCP-IP or UDP2 x SFP+ (6.25 Gbps)
Extra Features	<ul style="list-style-type: none">Embedded Web-Server4-channel Embedded Oscilloscope Function at 100 ksp/sEmbedded Waveform Generator<ul style="list-style-type: none">Embedded EPICS IOCFirmware Remote UpdateSynchronization of Multiple Units
Local Indicators	<ul style="list-style-type: none">LCD displayLEDs
Mechanical Dimensions	19" x 1 U x 230 mm
Weight	< 2 kg
AC Input Ratings	90 - 264 V _{AC} @ 47 - 63 Hz

1 0-FLUCS current transducers to be purchased separately
2 NO, NC and CENTER TAP are all three available on the connector

Ordering Code	Acronym	Description
REGUL8ORXAAA	REGUL8OR	Universal High-Precision Power Supply Controller

Copyright © CAEN ELS s.r.l. - 2024

All rights reserved. Information in this publication supersedes all previous versions.
Specifications subject to change without notice.

Rev. 1.2 - Printed in September 2024.