



**C T - 1 3**  
**C T - 2 6**  
**C T - 5 2**  
 Current or Voltage Output

Your **DIGITAL** POWER ELECTRONICS Partner.



## CT-PCB Series

- Closed-loop current transformer technology allows accurate monitoring of DC and AC bipolar currents up to  $\pm 52A$  with a small PCB-mount device.
- Galvanic isolation between primary and secondary conductor for simple current sensing at different potential.
- Standard current output and voltage output ("V"-version) available.

### FEATURES

- Monitoring of DC and AC currents
- Excellent Linearity
- Closed-loop detection
- Galvanically isolated from primary
- Low Temperature Drift
- Current-output or Voltage-output versions
- Wide Bandwidth
- High Accuracy
- UL 94 V-0 flammability grade
- LED indicates correct operation
- PCB-mount versions

### APPLICATIONS

- Power Supplies
- Sensing Element in Calibration System
- Biomedical Devices
- Test & Measurement Setups

The **0-FLUCS** (0-FLUX Current Sensor) family is based on a closed loop technology that allows accurate and precise monitoring of DC and AC currents with high bandwidth. The metal casing guarantees higher noise immunity and reduces undesired noise pick-up from external sources.

The transducers CT-13, CT-26 and CT-52 are PCB-mount devices rated at maximum currents of 13A, 26A and 52A with primary to secondary ratio of 1:250, 1:500 and 1:1000 respectively.

Galvanic isolation between the primary and the secondary circuits allows to measure currents at a different potential and simplifies interfacing when using the O-FLUCS as the feedback element of current regulated power supplies.

Output from the CT-PCB sensors can be chosen between two different versions: standard secondary current output or buffered voltage output (low temperature coefficient shunt resistor

and low-noise amplifier are embedded in the CT-13V, CT-26V and CT-52V).

Main characteristics of the 0-FLUCS current transformers are negligible temperature coefficient on the secondary output current, excellent linearity and extremely low noise.

DC current transformers represent the ideal replacement for systems where Hall-effect sensors are used as current sensing elements and better performances are needed.





The compact mechanical dimensions of this transducer series and its limited weight allow for easy mounting on printed circuit boards with a Through Hole (TH) topology. A plastic cover is placed on the bottom side of the device to allow for easier mounting on the PCB.

Main applications for these current transducers are precise and stable regulated power supplies and power inverters.



### About Us

ELS Instruments (formerly CAEN ELS) is a leading company in the design of power supplies and state-of-the-art complete electronic systems for the Physics research world, having its main focus on dedicated solutions for the particle accelerator community and high-end industrial applications.

-  Power Supply Systems
-  Precision Current Measurements
-  Beamline Electronics Instrumentation
-  FMC and MicroTCA

### ELS Instruments srl

Via Karl Ludwig von Bruck 32  
34144 - Trieste (TS)  
Italy

info@caenels.com  
www.els-instruments.com  
www.caenels.com

Due to the excellent characteristics, the CT PCB transducers can be used in a variety of calibration, acceptance testing and quality control applications in industrial, power generation and automotive fields.


Commercially available versions of the CT-13, CT-26 and CT-52 with their respective "V" voltage-output versions CT-13V, CT-26V and CT-52V.

Technical Specifications	CT-13	CT-26	CT-52
<b>Current Transform Ratio - N</b>	1:250	1:500	1:1000
<b>Maximum DC Primary Current - <math>I_{P(DC)}</math></b>	±13 A	±26 A	±52 A
<b>Maximum RMS Primary Current - <math>I_{P(RMS)}</math></b>	9.2 A	18.4 A	36.8 A
<b>Current Polarity</b>	Bipolar		
<b>Maximum DC Secondary Current - <math>I_{S(DC)}</math></b>	±52 mA		
<b>Maximum RMS Secondary Current - <math>I_{S(RMS)}</math></b>	37 mA		
<b>Small Signal Bandwidth - typ.</b>	500 kHz		
<b>Small Signal Bandwidth - "V"-version - typ.</b>	> 200 kHz		
<b>Noise (RMS) - typ.</b>	< 1 ppm (@200 Hz) < 10 ppm (@50 kHz)		
<b>Output Voltage ("V"-version) - <math>V_{OUT}</math></b>	±10 V		
<b>Output Voltage Ratio ("V" version) - <math>V_{OUT}/I_{P(DC)}</math></b>	0.8 V/A	0.4 V/A	0.2 V/A
<b>Maximum Output Current - "V"-version</b>	±15 mA		
<b>External Shunt Resistor (current output only) - <math>R_s</math></b>	0...40 Ω		
<b>Temperature Coefficient - TC (typ.)</b>	< 0.5 ppm/K < 2 ppm/K ("V"-version)		
<b>Protection Signal</b>	Yes - OK Status		
<b>Supply Voltage (± 6%)</b>	±15 V		
<b>Connections</b>	16-pin through-hole PCB mounting		
<b>Mechanical (Outer) Dimensions</b>	66 × 68 × 48 mm		
<b>Primary Conductor</b>	Internal		
<b>Maximum Weight</b>	300 g		



### 0-FLUCS Closed-Loop Technology

The CT-PCB current transducer series is based on the CAEN ELS 0-FLUCS Closed-Loop Technology.

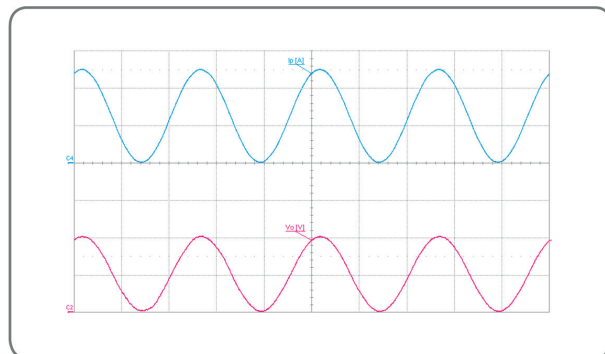

CT-PCB Voltage Output - "V" Version 

DC + 20-kHz sine-wave primary current - i.e.  $I_p$  [A] - and output voltage of a CT-13V version - i.e.  $V_o$  [V]

Ordering Code	Acronym	Description
WCT13XAAAAAA	CT-13	13A Primary Current O-FLUCS, PCB-Mounting
WCT26XAAAAAA	CT-26	26A Primary Current O-FLUCS, PCB-Mounting
WCT52XAAAAAA	CT-52	52A Primary Current O-FLUCS, PCB-Mounting
WCT13VXAAAAA	CT-13V	13A Primary Current O-FLUCS, PCB-Mounting, Voltage-Output
WCT26VXAAAAA	CT-26V	26A Primary Current O-FLUCS, PCB-Mounting, Voltage-Output
WCT52VXAAAAA	CT-52V	52A Primary Current O-FLUCS, PCB-Mounting, Voltage-Output